


COMMON GROUND | Initial system and failure paths

20 MW IT / PUE 1.25 / 25 MW facility | Planning assumptions, not engineering certification

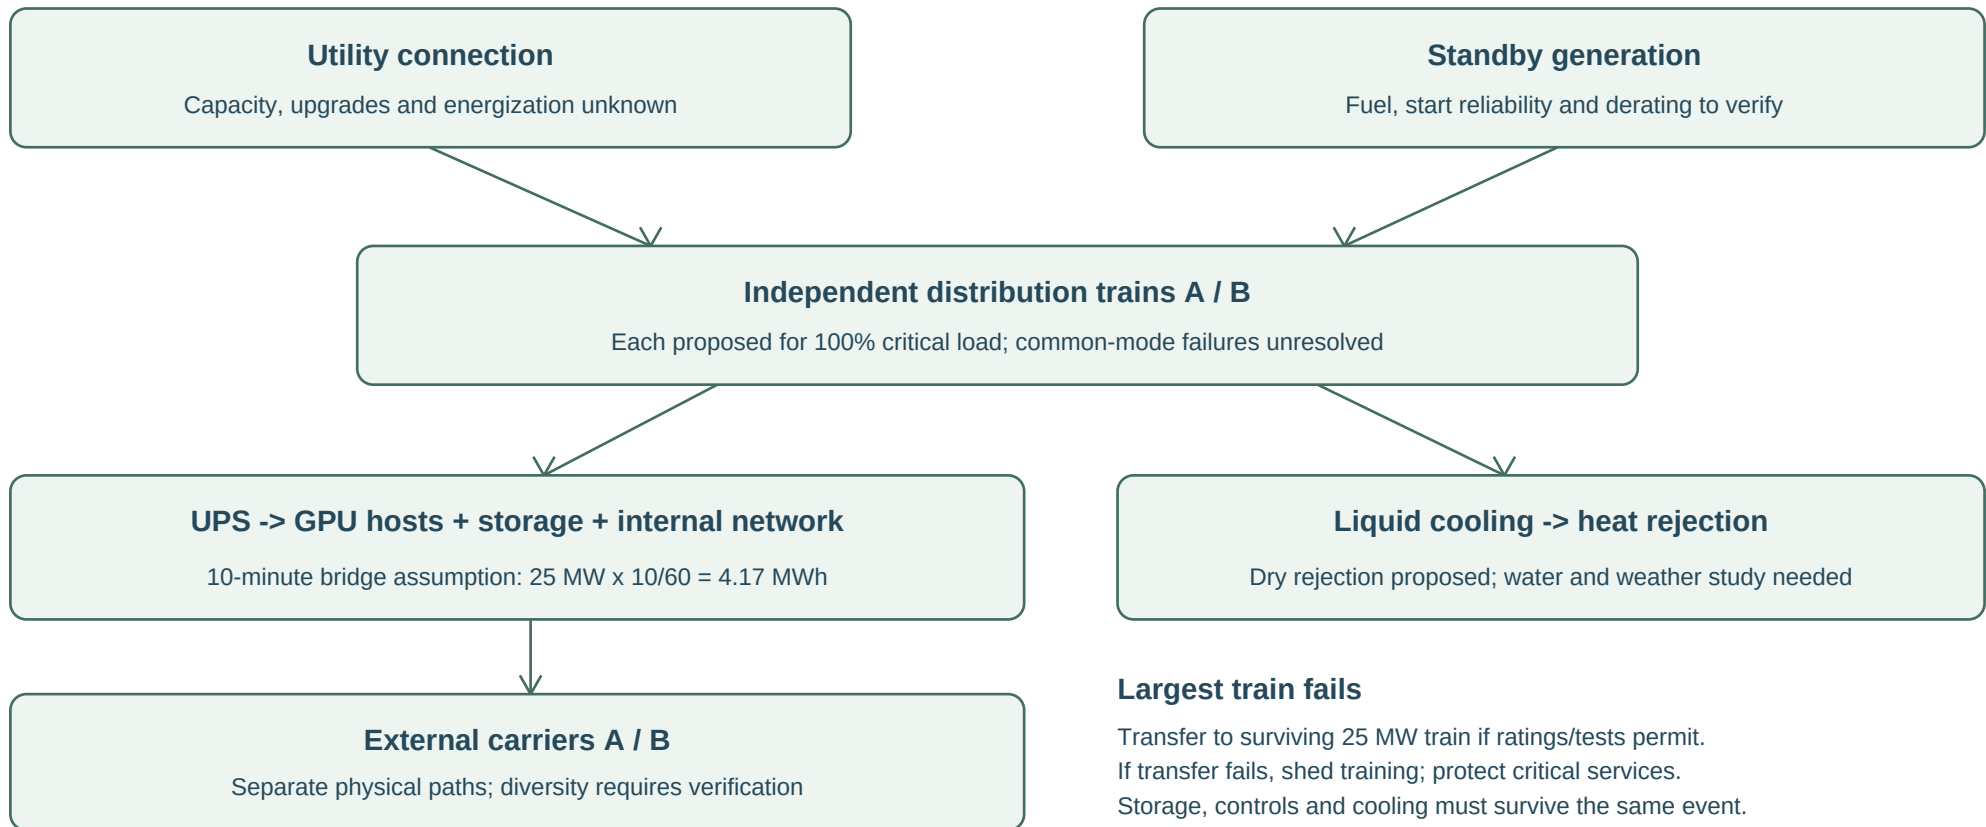

48 hours without grid

UPS bridges start; generators must supply IT, network, storage and cooling. At full load: $25 \times 48 = 1,200 \text{ MWh}$.

Illustrative fuel factor 0.25 L/kWh implies 300,000 L before reserve. Not a tank-size or autonomy guarantee.

Verify fuel curves, usable stock, replenishment, emission permits, protection coordination, cooling restart and integrated failure tests.

No firm solar/wind credit. Proposed 99.9% service target remains unproven; checkpoints protect restartable training work.